



National Fenestration Rating Council®

CERTIFIED

VELUX®

VEL-N-17-00037-00001

Skylight Model VS/VSE/VSS (89)
Tempered over Laminated Heat-Strengthened (i89)
0.02 LoE3, Argon-filled IGU

Puits de lumière modèle VS/VSE/VSS (89),
Trempe sur blanc laminé renforcé à la chaleur
0.02 LoE3, unité d'isolation de verre rempli d'argon


ENERGY STAR® Certified in Highlighted Regions
Certifié ENERGY STAR dans les régions en surbrillance

Canada
energystar.gc.ca



ENERGY STAR

U.S. / É.U.
energystar.gov

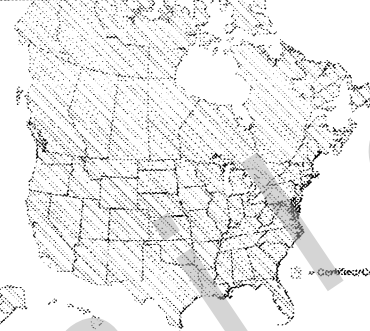

IAPMO ER
#199

Florida Prod. Approval
13309

ENERGY PERFORMANCE RATINGS
ÉVALUATION DU RENDEMENT ÉNERGÉTIQUE

U-Factor
Valeur-U

0.38

(U.S./I-P)

2.16

(Metric/SI)

Solar Heat Gain Coefficient
Coefficient de gain chaleur solaire

0.23

ADDITIONAL PERFORMANCE RATINGS
ÉVALUATION SUPPLÉMENTAIRE DU RENDEMENT

Visible Transmittance
Transmission Visible

0.52

Air Leakage
Infiltration d' Air

(U.S./I-P)

(Metric/SI)

Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for any specific use. Consult manufacturer's literature for product performance information
www.nfrc.org

Selon le fabricant, ces cotes sont conformes aux procédures applicables du NFRC servant à établir le rendement global du produit. Les cotes NFRC sont établies selon les conditions environnementales et des dimensions de produit spécifiques. NFRC ne recommande aucun produits et ne garantie aucun produits dans leurs applications et recommandations d'installations. Consultez la littérature du manufacturier pour de l'information sur le rendement de tout autre produit.
www.nfrc.org

DO NOT REMOVE UNTIL FINAL INSPECTION/NE PAS RETIRER AVANT L'INSPECTION FINALE

Meets or Exceeds C.E.C. Air Infiltration Requirements

WINDOW & DOOR
MANUFACTURERS ASSOCIATION
WDMA
Hallmark Certified
www.wdma.com

VELUX Model
VS S06 2004

Licensee: 426-H-670

Ratings for above size and smaller
Manufacturer Stipulates Conformance as indicated below

STANDARD

AAMA/WDMA/CSA
101/I.S.2/A440-11

AAMA/WDMA/CSA
101/I.S.2/A440-08

CSA A440S1-09

RATING

SKG-PG65
Size Tested: 1197 x 1238 mm (47 x 49 in)
DP = 17715 Pa (370 psf)

Class CW-PG50
Size Tested: 1197 x 1238 mm (47 x 49 in)
DP = 11270 Pa (235 psf)

DP: +11252/-2394 Pa (+235/-50 psf)
Water Test Pressure = 720 Pa (15 psf)
Canadian Air Infiltration/Exfiltration = A3 Level

17.6 mm Pane

LA Research Report
25885

**KEEP LABEL FOR
CODE INSPECTION
AND HOME RECORDS**

www.veluxusa.com
www.velux.ca
1-800-88-VELUX

VELUX America Inc.
PO Box 5001
Greenwood, SC 29648

VELUX®