



National Fenestration Rating Council®

CERTIFIED

VELUX®

VEL-N-21-00034-00002

**Skylight Model VCM/VCE/VCS (9994)
Tempered over Laminated Heat-Strengthened (i89)
0.02 LoE3, Argon-filled IGU**

**Puits de lumière modèle VCM/VCE/VCS (9994),
Trempe sur blanc laminé renforcit à la chaleur
0.02 LoE3, unité d'isolation de verre rempli d'argon**

**ENERGY PERFORMANCE RATINGS
ÉVALUATION DU RENDEMENT ÉNERGÉTIQUE**

U-Factor
Valeur-U

0.47

(U.S./I-P)

2.67

(Metric/SI)

Solar Heat Gain Coefficient
Coefficient de gain chaleur solaire

0.23

**ADDITIONAL PERFORMANCE RATINGS
ÉVALUATION SUPPLÉMENTAIRE DU RENDEMENT**

Visible Transmittance
Transmission Visible

0.54

Air Leakage
Infiltration d' Air

-

(U.S./I-P)

(Metric/SI)

Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for any specific use. Consult manufacturer's literature for product performance information.

www.nfrc.org

Selon le fabricant, ces cotes sont conformes aux procédures applicables du NFRC servant à établir le rendement global du produit. Les cotes NFRC sont établies selon les conditions environnementales et des dimensions de produit spécifiques. NFRC ne recommande aucun produits et ne garantie aucun produits dans leurs applications et recommandations d'installations. Consultez la littérature du manufacturier pour de l'information sur le rendement de tout autre produit.

www.nfrc.org


**ENERGY STAR® Certified in Highlighted Regions
Certifié ENERGY STAR dans les régions en surbrillance**

Canada
energystar.gc.ca



ENERGY STAR

U.S. / É.U.
energystar.gov

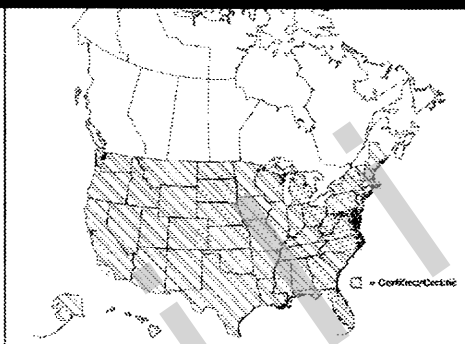

**IAPMO ER
#199**

DO NOT REMOVE UNTIL FINAL INSPECTION. NE PAS RETIRER AVANT L'INSPECTION FINALE

Meets or Exceeds C.E.C. Air Infiltration Requirements

WINDOW & DOOR
MANUFACTURERS ASSOCIATION
WDMA
Hallmark Certified
www.wdma.com

VELUX Model

VCM 4646 2004

Licensee: 426-H-695

Ratings for above size and smaller
Manufacturer Stipulates Conformance as indicated below

STANDARD

RATING

AAMA/WDMA/CSA
101/I.S.2/A440-11

SKG-PG45
Size Tested: 1305 x 1305 mm (51 x 51 in)
DP = 11052 Pa (230 psf)

AAMA/WDMA/CSA
101/I.S.2/A440-08

Class CW-PG40
Size Tested: 1305 x 1305 mm (51 x 51 in)
DP = 7920 Pa (165 psf)

CSA A440S1-09

DP: +7920/-1915 Pa (+165/-40 psf)
Water Test Pressure = 720 Pa (15 psf)
Canadian Air Infiltration/Exfiltration = A3 Level

TDi Product Evaluation
SK-03
Florida Prod. Approval
13560

18.4 mm Pane

LA Research Report
25885

**KEEP LABEL FOR
CODE INSPECTION
AND HOME RECORDS**

www.veluxusa.com
www.velux.ca
1-800-88-VELUX

VELUX America Inc.
PO Box 5001
Greenwood, SC 29648

VELUX®