


ELEVATION

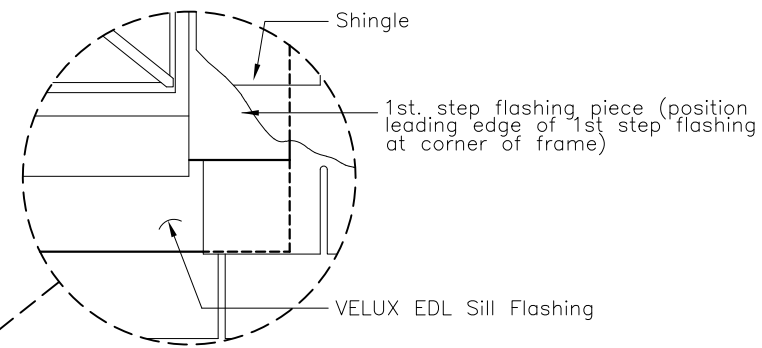

BASIS OF DESIGN:  
VELUX VSE  
Electric venting Skylight

VELUX EDL  
Step flashing

Sheathing

Underlayment

6 mm Max.  
1/4" Max.

VELUX EDL  
Step flashing

Asphalt  
shingle

Underlayment  
Note 1 & 2

Tight joint  
between finish  
groove and  
finish material.


Insulation

Vapor barrier  
Note 3

Finish material

SECTION B-B

Blocking as required  
per code(s).  
Insulate carefully  
around shaft

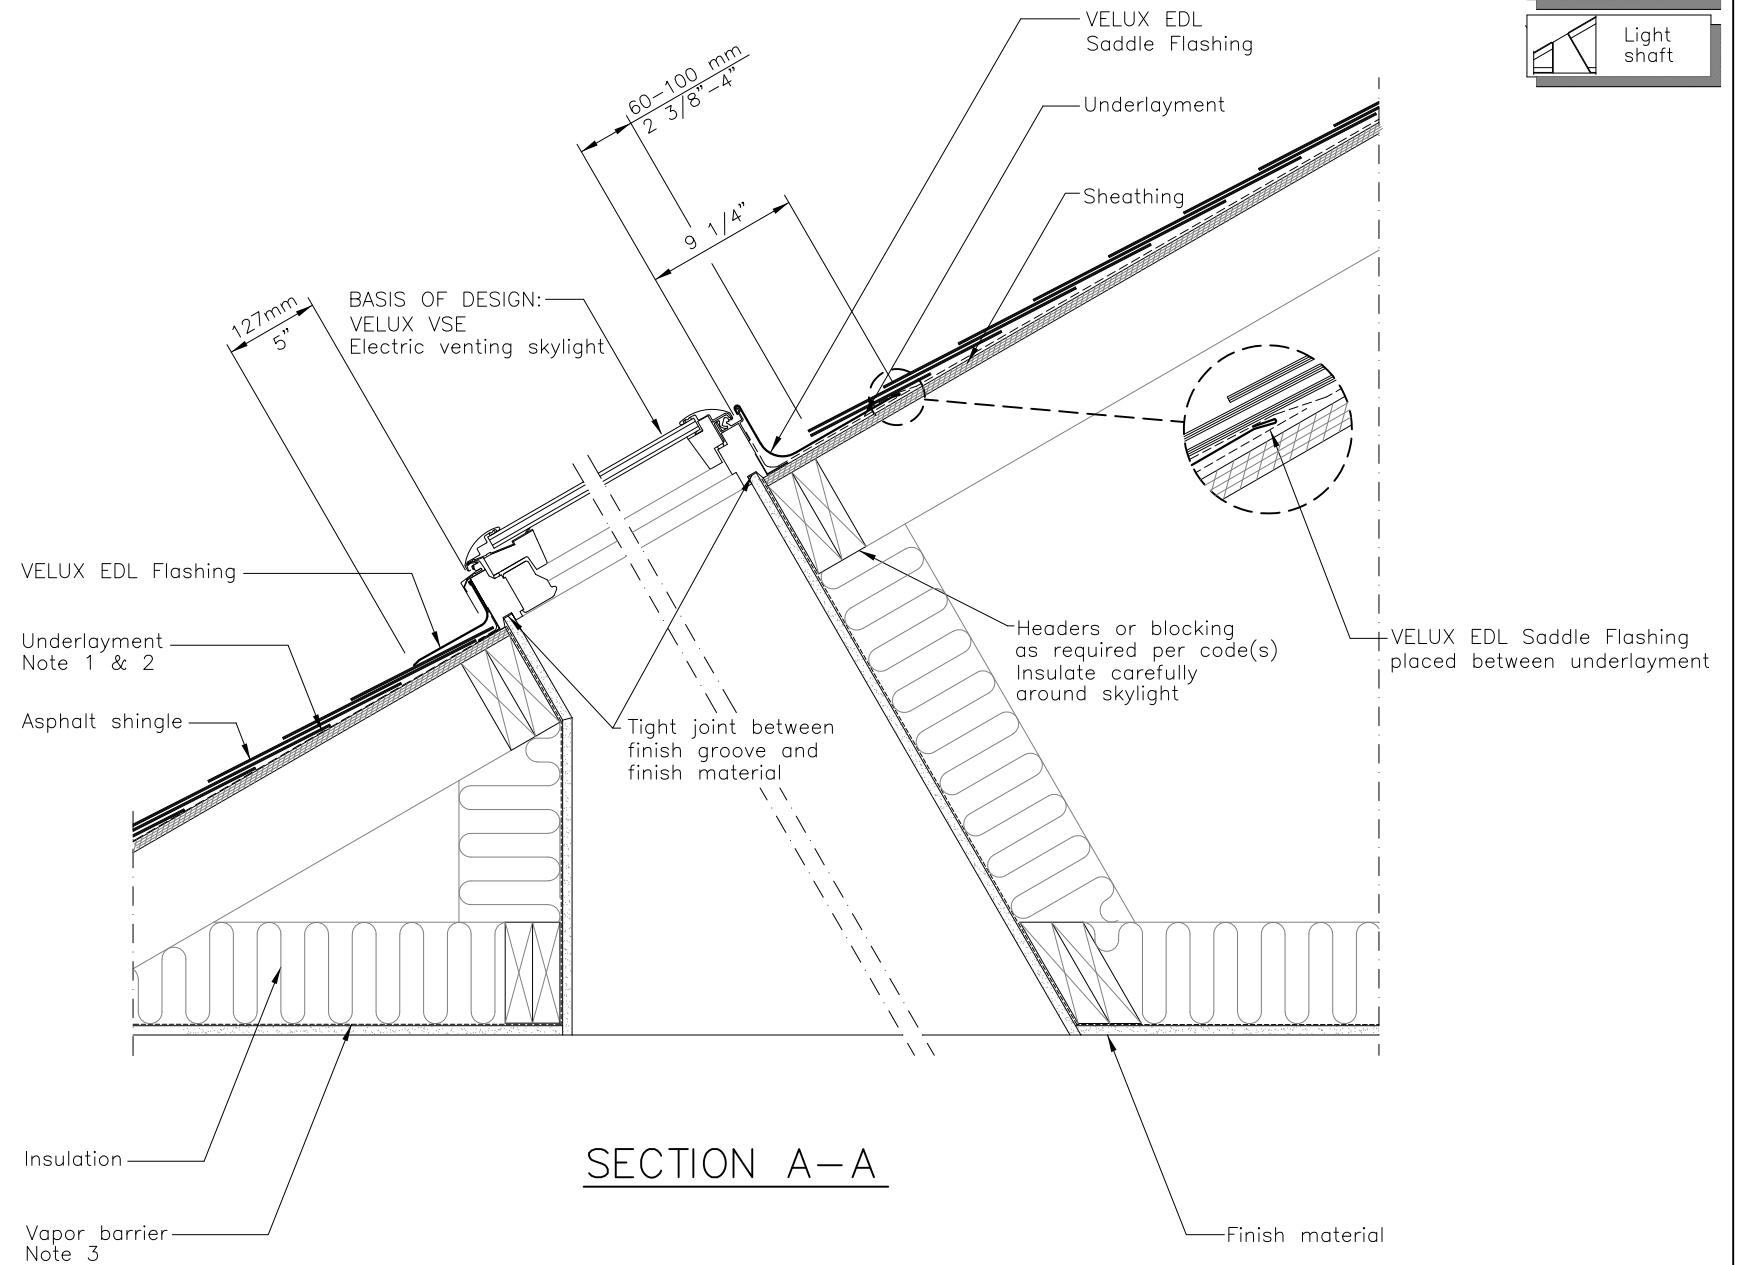

SECTION A-A

GENERAL NOTES

1. Wrap frame in ZOZ 216 adhesive underlayment provided with VELUX flashing.
2. Underlayment to be folded up against all sides of skylight.
3. Vapor barrier should be used to avoid moisture.

	VSE
	EDL
	Asphalt shingles
	Light shaft

 Sky-Product Management	VELUX 1418 Evans Pond Road Greenwood, SC 29649 1-800-88-VELUX www.VELUXUSA.com	<table border="1"> <tr> <td>Name</td> <td>Date</td> </tr> <tr> <td>Drawn by JDH</td> <td>July 2020</td> </tr> <tr> <td>Checked by WQ, JL</td> <td>July 2020</td> </tr> </table>	Name	Date	Drawn by JDH	July 2020	Checked by WQ, JL	July 2020
	Name	Date						
Drawn by JDH	July 2020							
Checked by WQ, JL	July 2020							
VSE-Residential/Commercial Roof Section (Light Shaft and Asphalt Shingles)		Drawing No.  VSE-02-0720						

This drawing is an instrument of service and is provided for informational use only.