



National Fenestration Rating Council®

CERTIFIED

VELUX®

VEL-N-18-00030-00001

Skylight Model FS (89)
Tempered over Laminated Heat-Strengthened (i89)
0.02 LoE3, Argon-filled IGU

Puits de lumière modèle FS (89),
Trempe sur blanc laminé renforcé à la chaleur
0.02 LoE3, unité d'isolation de verre rempli d'argon


ENERGY STAR® Certified in Highlighted Regions
Certifié ENERGY STAR dans les régions en surbrillance

Canada
energystar.gc.ca



ENERGY STAR

U.S. / É.U.
energystar.gov

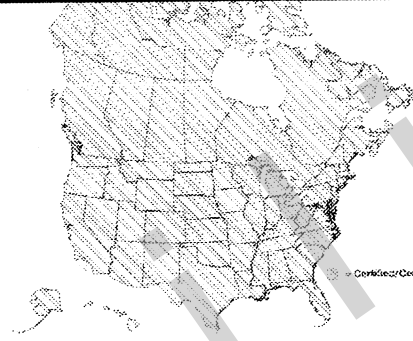

IAPMO ER
#199

Florida Prod. Approval
13308

ENERGY PERFORMANCE RATINGS
ÉVALUATION DU RENDEMENT ÉNERGÉTIQUE

U-Factor
Valeur-U

0.38

2.16

Solar Heat Gain Coefficient
Coefficient de gain chaleur solaire

0.25

ADDITIONAL PERFORMANCE RATINGS
ÉVALUATION SUPPLÉMENTAIRE DU RENDEMENT

Visible Transmittance
Transmission Visible

0.59

Air Leakage
Infiltration d' Air

(Metric/SI)

(U.S./I-P)

Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for any specific use. Consult manufacturer's literature for product performance information
www.nfrc.org

Selon le fabricant, ces cotes sont conformes aux procédures applicables du NFRC servant à établir le rendement global du produit. Les cotes NFRC sont établies selon les conditions environnementales et des dimensions de produit spécifiques. NFRC ne recommande aucun produits et ne garantie aucun produits dans leurs applications et recommandations d'installations. Consultez la littérature du fabricant pour de l'information sur le rendement de tout autre produit.
www.nfrc.org

DO NOT REMOVE UNTIL FINAL INSPECTION/NE PAS RETIRER AVANT L'INSPECTION FINALE

Meets or Exceeds C.E.C. Air Infiltration Requirements

WINDOW & DOOR
MANUFACTURERS ASSOCIATION
WDMA
Hallmark Certified
www.wdma.com

VELUX Model
FS S06 2004

Licensee: 426-H-672

Ratings for above size and smaller
Manufacturer Stipulates Conformance as indicated below

| STANDARD | RATING |
|------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| AAMA/WDMA/CSA 101/I.S.2/A440-11 | SKG-PG70 Size Tested: 1137 x 1175 mm (45 x 46 in) DP = 7670 Pa (160psf) |
| AAMA/WDMA/CSA 101/I.S.2/A440-08 | Class CW-PG55 Size Tested: 1137 x 1175 mm (45 x 46 in) DP = 6230 Pa (130 psf) |
| CSA A440S1-09 | DP: +6224/-2633 Pa (+130/-55 psf) Water Test Pressure = 720 Pa (15 psf) Canadian Air Infiltration/Exfiltration = Fixed Level |

17.6 mm Pane

LA Research Report
25885

**KEEP LABEL FOR
CODE INSPECTION
AND HOME RECORDS**

www.veluxusa.com
www.velux.ca
1-800-88-VELUX

VELUX America Inc.
PO Box 5001
Greenwood, SC 29648

VELUX®