


Double Dome Smoke Vent

	Double Dome Smoke Vent Options				
	Size (Inside Curb Dimensions)	Quantity	Dome Material*	Dome Description and Designation	
	48"x48"		LuxGuard 0.118 0.118	White Smooth (XP2) Clear Smooth (XP1)	Max size 4x8

*Note: Dome Material thickness is sheet material's thickness prior to the manufacturing process.

Frame Finish Options Mill Finish (CSV)					
Fusible Link Temperature					
FA = 165F FA = 212F FC = 280F FD = 350F	FE = 360F FF = 370F FG = 386F FH = 450F				

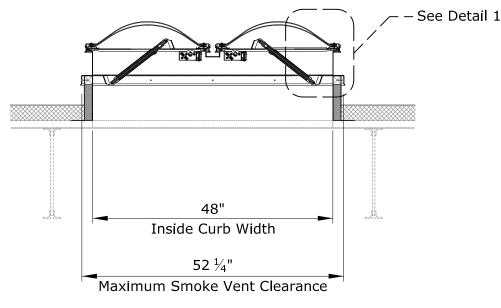

GENERAL NOTES

SECTION A-A

48"

Inside Curb Length

52 1/4"

Maximum Smoke Vent Clearance

SECTION B-B

- 1. This drawing emphasizes the CSV Double Dome Smoke Vent. It illustrates a general arrangement layout (plus recommendations) for a CSV installation in a 0-60 degree roof pitch application. The CSV Double Dome Smoke Vent installs directly on site built or prefabricated curbs.
- 2. The architectural/structural design and specifications for the inclusion of a commercial smoke vent, such as the CSV Double Dome Smoke Vent, in any roofing/ceiling application is determined and provided by others. The design criteria includes, but is not limited to design loads, structural configurations, structural framing member sizes and material, architectural finishes and integration with the roofing/ceiling systems of the building. VELUX recommends compliance by all designers and installers with all local and industry specific building codes and guidelines. VELUX assumes no responsibility or liability in the design, construction and performance of a building structure by others.
- 3. The CSV Frame is mill finish.

This drawing is an instrument of service and is provided for informational use only.



VELUX 1418 Evans Pond Road Greenwood, SC 29649 1-800-88-VELUX www.VELUXUSA.com

Double Dome Smoke Vent