

National Fenestration Rating Council®

CERTIFIED

VELUX®

VEL-N-17-00033-00001
 Skylight Model VS/VSE/VSS (05)
 Tempered over Tempered
 0.02 LoE3, Argon-filled IGU

Puits de lumière modèle VS/VSE/VSS (05),
 Trempé sur trempé
 0.02 LoE3, unité d'isolation de verre rempli d'argon

ENERGY PERFORMANCE RATINGS
ÉVALUATION DU RENDEMENT ÉNERGÉTIQUE

U-Factor
 Valeur-U

0.44
2.50

(U.S./I-P)

(Metric/SI)

Solar Heat Gain Coefficient
 Coefficient de gain chaleur solaire

0.23

ADDITIONAL PERFORMANCE RATINGS
ÉVALUATION SUPPLÉMENTAIRE DU RENDEMENT

Visible Transmittance
 Transmission Visible

0.54

Air Leakage
 Infiltration d' Air

-

(U.S./I-P)

(Metric/SI)

Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for any specific use. Consult manufacturer's literature for product performance information

www.nfrc.org

Selon le fabricant, ces cotes sont conformes aux procédures applicables du NFRC servant à établir le rendement global du produit. Les cotes NFRC sont établies selon les conditions environnementales et des dimensions de produit spécifiques. NFRC ne recommande aucun produits et ne garantie aucun produits dans leurs applications et recommandations d'installations. Consultez la littérature du fabricant pour de l'information sur le rendement de tout autre produit.

www.nfrc.org


ENERGY STAR® Certified in Highlighted Regions
Certifié ENERGY STAR dans les régions en surbrillance

Canada
energystar.gc.ca



ENERGY STAR

U.S. / É.U.
energystar.gov

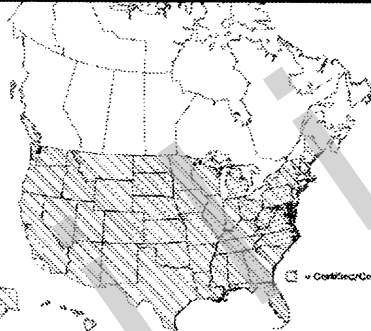

DO NOT REMOVE UNTIL FINAL INSPECTION; NE PAS RETIRER AVANT L'INSPECTION FINALE

Meets or Exceeds C.E.C. Air Infiltration Requirements

WINDOW & DOOR
 MANUFACTURERS ASSOCIATION
WDMA
 Hallmark Certified
www.wdma.com

VELUX Model
VS S06 2005
 Licensee: 426-H-670

Ratings for above size and smaller
 Manufacturer Stipulates Conformance as indicated below

STANDARD

RATING

AAMA/WDMA/CSA
 101/11.S.2/A440-11

SKG-PG90
 Size Tested: 1197 x 1238 mm (47 x 49 in)
 DP = 14390 Pa (300 psf)

AAMA/WDMA/CSA
 101/11.S.2/A440-08

Class CW-PG70
 Size Tested: 1197 x 1238 mm (47 x 49 in)
 DP = 9600 Pa (200 psf)

CSA A440S1-09

DP: +9600/-3352 Pa (+200/-70 psf)
 Water Test Pressure = 720 Pa (15 psf)
 Canadian Air Infiltration/Exfiltration = A3 Level

TDI Product Evaluation
 SK-03
 Florida Prod. Approval
 13309

17.2 mm Pane

**KEEP LABEL FOR
 CODE INSPECTION
 AND HOME RECORDS**

www.veluxusa.com
www.velux.ca
1-800-88-VELUX

VELUX America Inc.
 PO Box 5001
 Greenwood, SC 29648

VELUX®