





0:12 - 20:12


SEE DETAIL 1

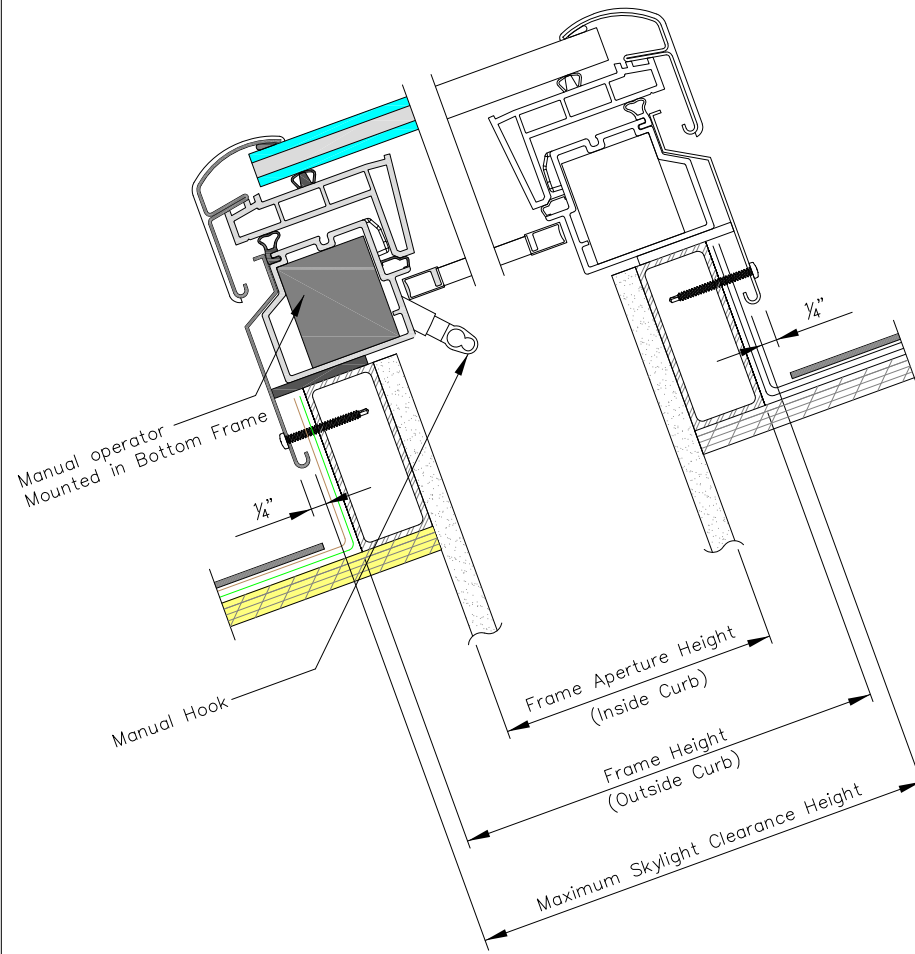

**VERTICAL CROSS SECTION**

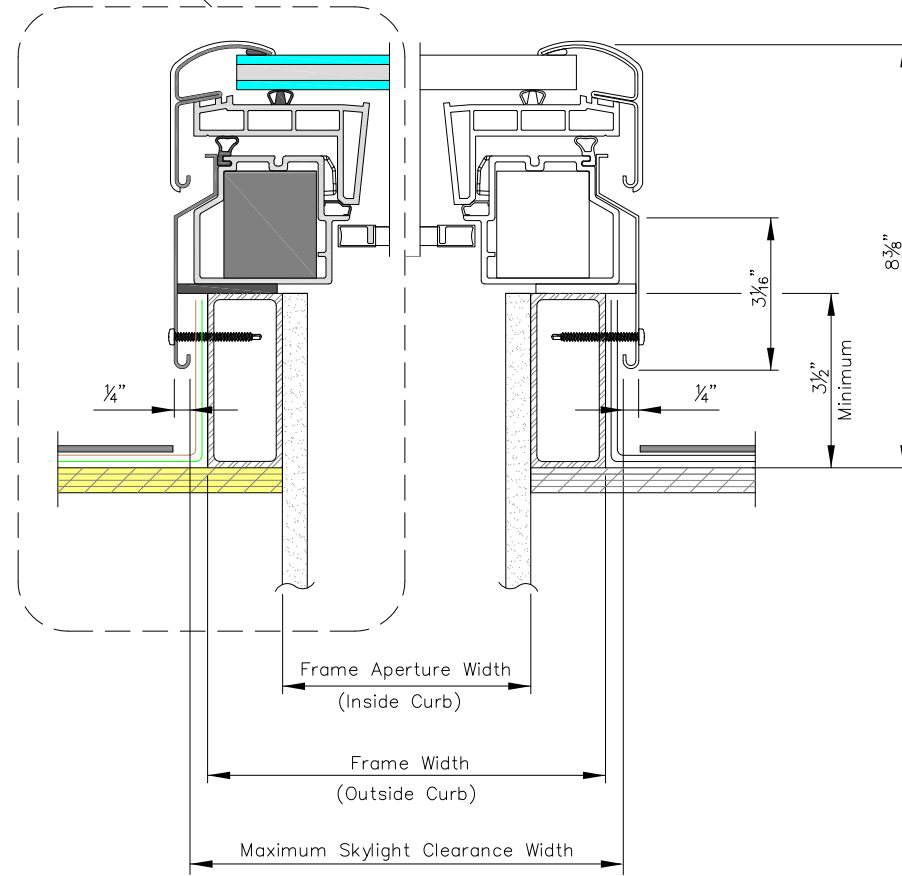

**HORIZONTAL CROSS SECTION**

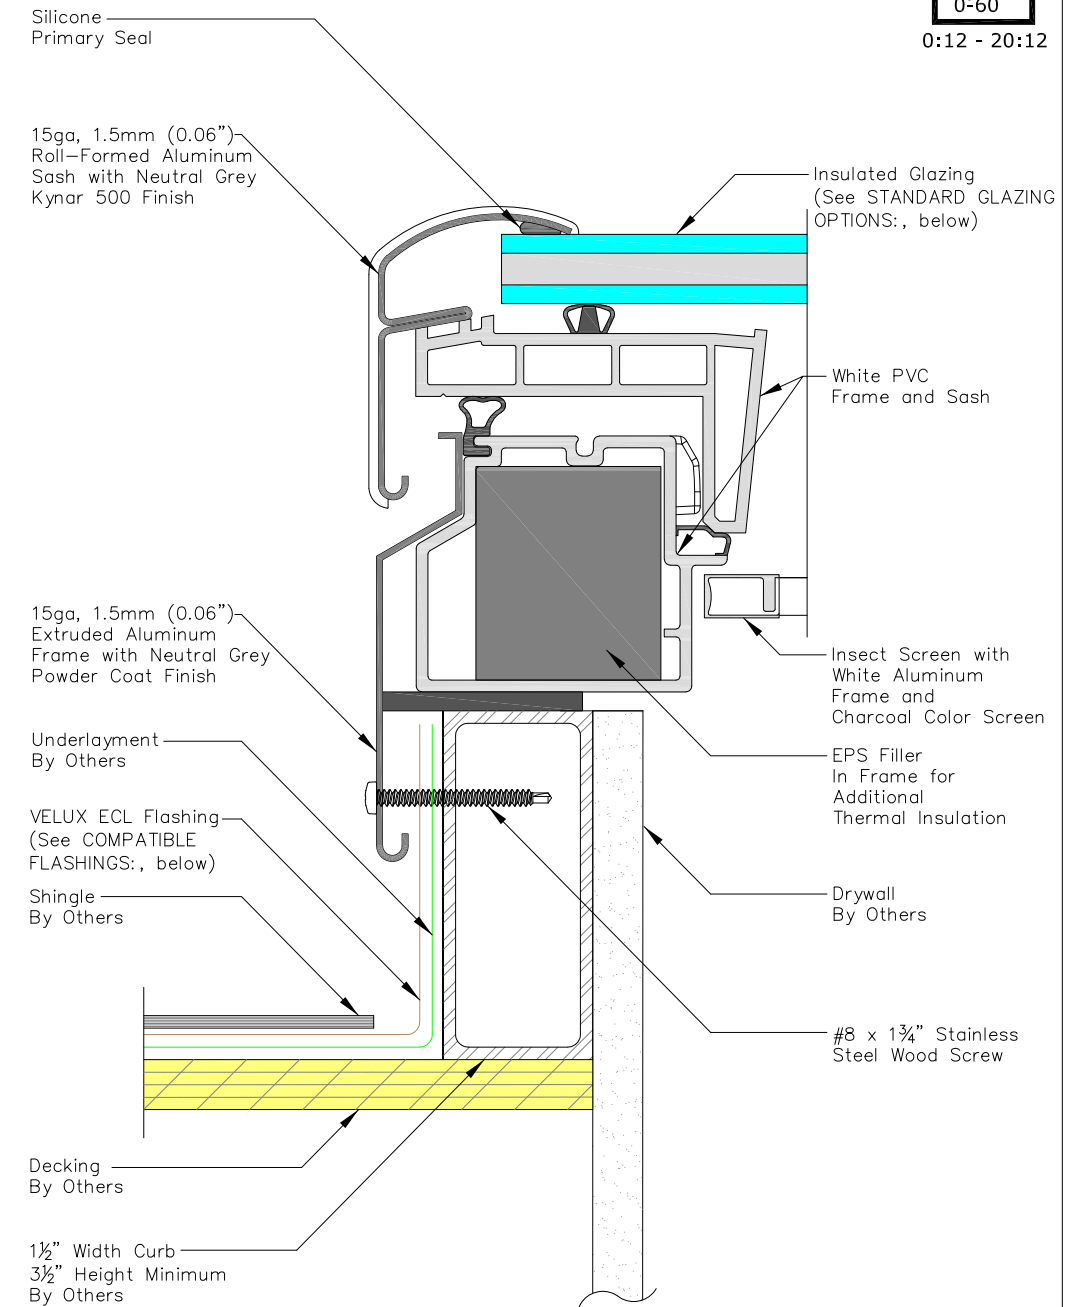

**DETAIL 1**

**PRODUCT DIMENSIONS**


METRIC UNITS (MILLIMETERS)								IMPERIAL UNITS (INCHES)							
Size	Frame Width	Frame Aperture Width	Maximum Skylight Clearance Width	Frame Height	Frame Aperture Height	Maximum Skylight Clearance Height	Daylight Area* (Sq. Meters)	Size	Frame Width	Frame Aperture Width	Maximum Skylight Clearance Width	Frame Height	Frame Aperture Height	Maximum Skylight Clearance Height	Daylight Area* (Sq. Feet)
2222	648	572	675.3	648	572	675.3	0.24	2222	25 1/2	22 1/2	26 9/16	25 1/2	22 1/2	26 9/16	2.58
2234	648	572	675.3	952	876	980	0.39	2234	25 1/2	22 1/2	26 9/16	37 1/2	34 1/2	38 9/16	4.20
2246	648	572	675.3	1257	1181	1284.8	0.55	2246	25 1/2	22 1/2	26 9/16	49 1/2	46 1/2	50 9/16	5.92
3030	851	775	878.4	851	775	878.4	0.49	3030	33 1/2	30 1/2	34 9/16	33 1/2	30 1/2	34 9/16	5.27
3046	851	775	878.4	1257	1181	1284.8	0.77	3046	33 1/2	30 1/2	34 9/16	49 1/2	46 1/2	50 9/16	8.29
3434	952	876	980	952	876	980	0.64	3434	37 1/2	34 1/2	38 9/16	37 1/2	34 1/2	38 9/16	6.89
4646	1257	1181	1284.8	1257	1181	1284.8	1.22	4646	49 1/2	46 1/2	50 9/16	49 1/2	46 1/2	50 9/16	13.13

- STANDARD GLAZING OPTIONS:**
- Laminated LowE3 (04)
  - Impact (06)
  - White Laminated (08)
- \*Tempered Exterior Pane used with all options

- COMPATIBLE FLASHINGS:**
- ECL Step flashing
  - ECW Tile flashing

**NOTES:**  
1. Max sash opening is 11" by stainless steel chain.

This drawing is an instrument of service and is provided for informational use only.



Sky-Global Product Management

VELUX  
1418 Evans Pond Road  
Greenwood, SC 29649  
1-800-88-VELUX  
www.VELUXUSA.com

VCM - Venting Curb Mounted Skylight