



National Fenestration Rating Council®

CERTIFIED

**VELUX®**

VEL-N-17-00034-00001

Skylight Model VS/VSE/VSS (06)  
Tempered over Laminated Heat-Strengthened  
0.02 LoE3, Argon-filled IGU

Puits de lumière modèle VS/VSE/VSS (06),  
Trempe sur laminé renforcit à la chaleur  
0.02 LoE3, unité d'isolation de verre rempli d'argon

**ENERGY PERFORMANCE RATINGS  
ÉVALUATION DU RENDEMENT ÉNERGÉTIQUE**

U-Factor  
Valeur-U

(U.S./I-P) **0.41**  
(Metric/SI) **2.33**

Solar Heat Gain Coefficient  
Coefficient de gain chaleur solaire

**0.23**

**ADDITIONAL PERFORMANCE RATINGS  
ÉVALUATION SUPPLÉMENTAIRE DU RENDEMENT**

Visible Transmittance  
Transmission Visible

**0.53**

Air Leakage  
Infiltration d' Air

-

(U.S./I-P)

(Metric/SI)

Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for any specific use. Consult manufacturer's literature for product performance information.


[www.nfrc.org](http://www.nfrc.org)

Selon le fabricant, ces cotes sont conformes aux procédures applicables du NFRC servant à établir le rendement global du produit. Les cotes NFRC sont établies selon les conditions environnementales et des dimensions de produit spécifiques. NFRC ne recommande aucun produit et ne garantit aucun produit dans leurs applications et recommandations d'installations. Consultez la littérature du fabricant pour de l'information sur le rendement de tout autre produit.

[www.nfrc.org](http://www.nfrc.org)


**ENERGY STAR® Certified in Highlighted Regions  
Certifié ENERGY STAR dans les régions en surbrillance**

Canada  
[energystar.gc.ca](http://energystar.gc.ca)



ENERGY STAR

U.S. / É.U.  
[energystar.gov](http://energystar.gov)

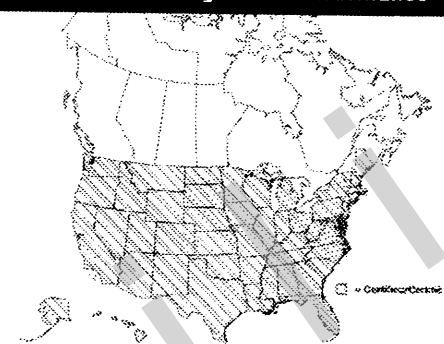

DO NOT REMOVE UNTIL FINAL INSPECTION / NE PAS RETIRER AVANT L'INSPECTION FINALE

Meets or Exceeds C.E.C. Air Infiltration Requirements

WINDOW & DOOR  
MANUFACTURERS ASSOCIATION



**WDMA**

Hallmark Certified

[www.wdma.com](http://www.wdma.com)

**VELUX Model  
VS M08 2006**  
Licensee: 426-H-670

Ratings for above size and smaller  
Manufacturer Stipulates Conformance as indicated below

STANDARD	RATING
AAMA/WDMA/CSA 101/I.S.2/A440-11	SKG-PG65 Size Tested: 776 x 1390 mm (31 x 55 in) DP = 17237 Pa (360 psf)
AAMA/WDMA/CSA 101/I.S.2/A440-08	Class CW-PG50 Size Tested: 776 x 1390 mm (31 x 55 in) DP = 11030 Pa (230 psf)
CSA A440S1-09	DP: +11012/-2394 Pa (+230/-50 psf) Water Test Pressure = 720 Pa (15 psf) Canadian Air Infiltration/Exfiltration = A3 Level
ASTM E1886-05/ASTM E1996-06	Cycle Pressure +/-50 Wind Zone 3 Large Missile (C)



IAPMO  
ES  
TM

IAPMO ER  
#199

TDI Product Evaluation  
SK-14  
Florida Prod. Approval  
13309

18.2 mm Pane

**KEEP LABEL FOR  
CODE INSPECTION  
AND HOME RECORDS**

[www.veluxusa.com](http://www.veluxusa.com)  
[www.velux.ca](http://www.velux.ca)  
**1-800-88-VELUX**

VELUX America Inc.  
PO Box 5001  
Greenwood, SC 29648

**VELUX®**